



## FTTH Multi-Port Series Enclosures



Model SA



Model S

### Description


Made from high impact ABS Plastics. The OPTiLITE Multi-Port FTTH series enclosures provide a cost effective solution for point to point apartment, or large premises fibre distribution, which together with the OPTiLITE Customer Outlets, completes the Network.

### FEATURES

- Secure enclosed structure with tamper Key-Lock device
- Additional Quad Snap-Locking Clamps to support IP65 level protection
  - Compartment for splicing and fibre routing
    - Multiple Cable entry/exit ports
  - Accessories for Exit Port cable protection
    - Can accept PG7 Exit Port Glands
- Surface mount, or Pole mounting with additional bracket


### SPECIFICATIONS

Overall dimensions	380x245x115
Color	White/Grey
Material	ABS+PC
Protection Level to	IP65
Drop Cable	Flat/Round
Input Cable	Multicore
Capacity Model S	72-Splices
Capacity Model SA	36-Splices + 18 x Adapter Ports
Working Temp	-25°C/+60°C
Storage Temp	-40°C/+70°C
Air Pressure to	70KPa - 106KPa

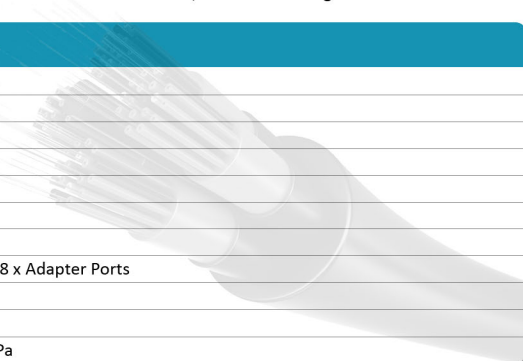



**Model SA**

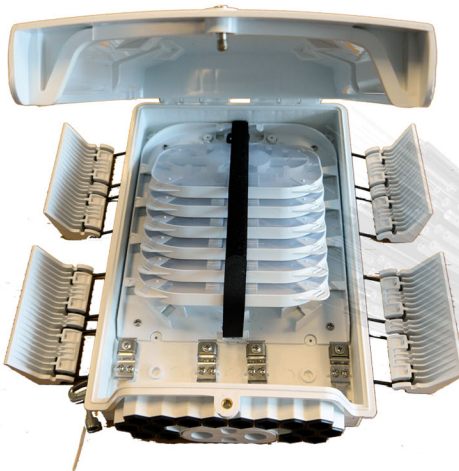

**Model S**