



IES-1081

8 FE + 2 GE SFP Managed Switch -40 to 75C, DIN-rail

Overview

LevelOne IES-1081 Industry Ethernet Switch provides 8 ports of 10/100Base-TX plus 2 ports of 1000Base SFP slots to enable high speed network at mission-critical environment. This device is designed to be mounted on an industry standard DIN-rail, plus the clearly visible status LEDs provide simple monitoring of port link activity. Moreover, the SFP slots support pluggable modules that enabling you to choose from a variety of transceivers.

High Reliability

All components are built to withstand harsh environment applications without compromise where humidity, temperature variation and even shock vibration are concerns, including Electric & Utility, Critical Infrastructure, Transportation and Surveillance Security. This device operates under -40 to 75 Celsius (-40 to 167 Fahrenheit) temperature.

Transportation Application

This device is certified by NEMA (National Manufacturers Association) TS2 Environmental requirements for the Traffic Control Equipment that withstand extreme temperatures, operating voltage and humidity fluctuation, vibration and shock commonly experienced in severe outdoor environments.

Features

- Complies with NEMA TS2 Environmental requirements for Traffic control equipment
- Complies with EN50121-4 environmental requirement for Railway application
- Supports α -ring and RSTP/MSTP/STP for Ethernet redundancy
- IP Multicast Filtering through IGMP Snooping V1, V2 & V3
- Supports port-based VLAN and IEEE802.1Q VLAN Tagging and GVRP
- IEEE802.1p QoS with four priority queues
- MAC-based trunking and LACP
- IEEE802.1x Security
- Bandwidth Rate Control
- Per-port programmable MAC address locking
- Up to 24 Static Secure MAC addresses per port
- Port mirroring

Resilient Ring Network

Supports Ring topology network providing simple installation and ultra fast network recovery performance, less than 15ms. Unlike much complex resilient topology, such as a redundant star, the Ring simplifies the network design and requires less cabling installation. In addition, fast network recovery time helps minimize system downtime.

Management

IES-1081 supports a variety of management features including: CLI via Console or Telnet; Graphic User Interface via Web Browser or Simple Network Management Protocol via SNMP tools. It provides better visibility and management of those critical assets.


Safety

This device has been tested under UL508 standard for Industrial Control Equipment to endurance under test turn on and off 6,000 times while loaded, with no single failure. It's highly reliability and safety measurement to ensure field hardened, especially for the harsh environment.

- NTP synchronization
- DHCP Client/Server
- RS-232 console, Telnet, SNMP V1, V2c & V3, RMON, Web Browser, and TFTP Management
- 1000Mbps-Full-duplex, 10/100Mbps-Full/Half-duplex, Auto-Negotiation, Auto-MDI/MDIX
- Full wire-speed forwarding rate
- -40°C to 75°C (-40°F to 167°F) operating temperature range, tested for functional operation @ -40°C to 85°C (-40°F to 185°F)
- DRAM 256MB
- Flash memory 4MB
- IGMP Querier and IGMP Filtering
- QoS Rate Limiting

Diagrams

Unit: mm

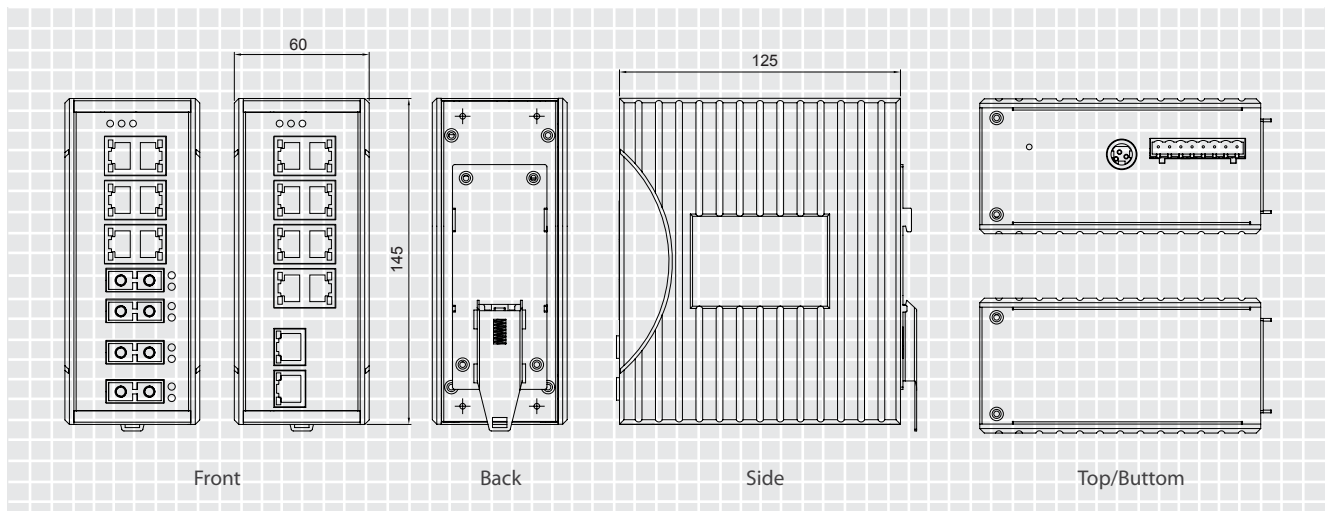

Specifications

Technology	
Standards	<ul style="list-style-type: none"> IEEE802.3 10BASE-T, IEEE802.3u 100BASE-TX/100BASE-FX, IEEE802.3ab 1000BASE-T, IEEE802.3z 1000BASE-SX/1000BASE-LX, IEEE802.3x, IEEE802.1p, IEEE802.1Q, IEEE802.1w, IEEE802.1x
Forward and Filtering Rate	<ul style="list-style-type: none"> 14,880pps for 10Mbps 148,810pps for 100Mbps 1,488,100pps for 1000Mbps
Packet Buffer Memory	<ul style="list-style-type: none"> 2M bits
Processing Type	<ul style="list-style-type: none"> Store-and-Forward Half-duplex back-pressure and IEEE802.3x full-duplex flow control
Address Table Size	<ul style="list-style-type: none"> 8192 MAC addresses

Power	
Input	<ul style="list-style-type: none"> Input Voltage: 12 to 48VDC (Terminal Block); 12VDC (DC Jack)
Power Consumption	<ul style="list-style-type: none"> 11W Max. 0.92A @ 12VDC, 0.46A @ 24VDC
Overload Current Protection	<ul style="list-style-type: none"> Present
Reverse Polarity Protection	<ul style="list-style-type: none"> Present

Mechanical	
Casing	<ul style="list-style-type: none"> Aluminum case IP30
Dimensions	<ul style="list-style-type: none"> 60mm (W) x 125mm (D) x 145mm (H) (2.36" (W) x 4.92" (D) x 5.7" (H))
Weight	<ul style="list-style-type: none"> 1.1Kg (2.42lbs.)
Installation	<ul style="list-style-type: none"> DIN-Rail (Top hat type35mm), Rack Mount, Wall Mount

Interface	
Ethernet Port	<ul style="list-style-type: none"> 10/100BASE-TX: 8, 6 or 4 port 100BASE-FX: 0 to 4 ports Gigabit: 0, 1 or 2 ports
Console Port	<ul style="list-style-type: none"> Port: One DB9 RS-232 port
LED Indicators	<ul style="list-style-type: none"> Per Unit: Power Status (Power 1, Power 2, Power 3) Per Port: 10/100TX, 100FX/ SFP: Link/Activity, Speed 10/100/1000TX, 1000SX/LX/ SFP: Link/Activity, Speed
Alarm Contact	<ul style="list-style-type: none"> one relay output with current 1A @ 24VDC

Environment	
Operating Temperature	<ul style="list-style-type: none"> -40°C to 75°C (-40°F to 167°F) Tested @ -40°C to 85°C (-40°F to 185°F)
Storage Temperature	<ul style="list-style-type: none"> -40°C to 85°C (-40°F to 185°F)
Ambient Relative Humidity	<ul style="list-style-type: none"> 5% to 95% (non-condensing)
MTBF	<ul style="list-style-type: none"> 52.54 years

Regulatory Approvals	
ISO	<ul style="list-style-type: none"> Manufactured in an ISO9001 facility
Safety	<ul style="list-style-type: none"> UL508
EMI	<ul style="list-style-type: none"> FCC Part 15, Class A EN61000-6-4 <ul style="list-style-type: none"> EN55022 EN61000-3-2 EN61000-3-3
EMS	<ul style="list-style-type: none"> EN61000-6-2 <ul style="list-style-type: none"> EN61000-4-2 (ESD Standards) Contact: +/- 6KV Air: +/- 8KV EN61000-4-3 (Radiated RFI Standards) 10V/m, 80 to 1000MHz; 80% AM EN61000-4-4 (Burst Standards) Signal Ports: +/- 4KV D.C. Power Ports: +/- 4KV EN61000-4-5 (Surge Standards) Signal Ports: +/- 2KV; Line-to-Earth D.C. Power Ports: +/- 2KV; Line-to-Earth EN61000-4-6 (Induced RFI Standards) Signal Ports: 10Vrms @ 0.15 - 80MHz; 80% AM D.C. Power Ports: 10Vrms @ 0.15 - 80MHz; 80% AM EN61000-4-8 (Magnetic Field Standards) 30A/m @ 50, 60Hz
Environmental Test Compliance	<ul style="list-style-type: none"> IEC60068-2-6 Fc (Vibration Resistance) 5g @ 10 - 150Hz, Amplitude 0.35mm (Operation/Storage/Transport) IEC60068-2-27 Ea (Shock) 25g @ 11ms (Half-Sine Shock Pulse; Operation) 50g @ 11ms (Half-Sine Shock Pulse; Storage/Transport) IEC60068-2-32 Ed (Free Fall) 1M (3.281ft.)

Order Information

IES-1081 - 8 FE + 2 GE SFP Managed Switch -40 to 75C, DIN-rail

Package Contents

IES-1081
CD Manual / Utility
Quick Installation Guide

Optional Accessories

SFP-4200 - 1.25G MMF SFP Transceiver (550m, 850nm, -20 to 85C)
SFP-4210 - 1.25G SMF SFP Transceiver (10km, 1310nm, -40 to 85C)
SFP-4240 - 1.25G SMF SFP Transceiver (40km, 1310nm, -40 to 85C)
SFP-4270 - 1.25G SMF SFP Transceiver (70km, 1550nm, -40 to 85C)
SFP-4310 - 1.25G BIDI SMF SFP Transceiver (10km, 1310nm, -40 to 85C)
SFP-4320 - 1.25G BIDI SMF SFP Transceiver (10km, 1550nm, -40 to 85C)

SFP-4330 - 1.25G BIDI SMF SFP Transceiver (20km, 1310nm, -40 to 85C)
SFP-4340 - 1.25G BIDI SMF SFP Transceiver (20km, 1550nm, -40 to 85C)
SFP-4350 - 1.25G BIDI SMF SFP Transceiver (40km, 1310nm, -40 to 85C)
SFP-4360 - 1.25G BIDI SMF SFP Transceiver (40km, 1550nm, -40 to 85C)
SFP-4370 - 1.25G BIDI SMF SFP Transceiver (60km, 1310nm, -40 to 85C)
SFP-4380 - 1.25G BIDI SMF SFP Transceiver (60km, 1550nm, -40 to 85C)