



IFS-0501 Version: 1

5-Port Fast Ethernet Industrial Switch, -40°C to 75°C

The LevelOne IFS-0501 Industrial Fast Ethernet Switch provides 5 ports at 10/100M TX to enable high speed network in mission-critical environments. With an industrial standard DIN-rail mount, this switch can be installed in a cabinet, and clearly visible status LEDs provide simple monitoring of port link activity. The switch is housed in a solid metal case rated at IP30, keeping it safe from dust, vibration, heat and humidity, while an operational temperature range of -40°C to +75°C makes it suitable for deployment in almost any environment.

Key Features

- Provides flexibility of 5x 10/100BASE-TX ports
- 10/100Mbps, full/half-duplex, auto-negotiation, auto-MDI/MDIX
- -40°C to 75°C operating temperature range
- Provides DIN-rail, wall or desktop mounting
- IP30 metal case
- Redundant power inputs with Terminal Block
- Supports 9 to 56VDC power inputs

Specifications

System Specifications

Standards & Protocols:

IEEE 802.3 10Base-T Ethernet
 IEEE 802.3u 100Base-TX Fast Ethernet
 IEEE 802.3u 100Base-FX Fast Ethernet
 IEEE802.3x Flow Control and Back Pressure

Memory:

1M

Buffer Memory:


1M

Connectors and Cabling:

5 x 10/100M TX
 1 x Terminal block

Indicator:

PW1 (Power 1) : Green / PW2 (Power 2) : Green /
 SW(Relay) : Amber
 LNK (RJ45) : Green



Transmission Method:
Store-and-Forward

Power Input:
Redundant Dual DC 9V-56V

Power Output:
Alarm Relay Output 1A @ 24VDC

Performance

Backplane (Gbps):
1G

MAC Address Table:
1K

Data Transfer Rate:
10/100Mbps

Packet Forwarding Rate:
100Mbps port - 148,000pps
10Mbps port - 14,880pps

Environment

Temperature (°C):
Operating: - 40°C ~ 75°C
Storage: - 40°C ~ 85°C

Humidity (Non-condensing):
Storage: 5% ~ 95%
Operating: 5% ~ 95%

Deployment:
Desk, din rail, wall mount

Physical Specifications

Dimensions (W x D x H mm):
36.2 x 105 x 142 mm

Weight (g):
460 g

Reliability

MTBF:
150,000 hrs at 25°C


Approval and Compliance

EMI/EMS:
FCC, CE, RoHS, VCCI

Safety:
EN60950-1

Environmental Test:
EN55022/24
EN55011
EN50121-3-2
EN50121-4 (pending)
EN50155 (pending)
EN60068-2-6
EN60068-2-27
EN60068-2-32

Diagram

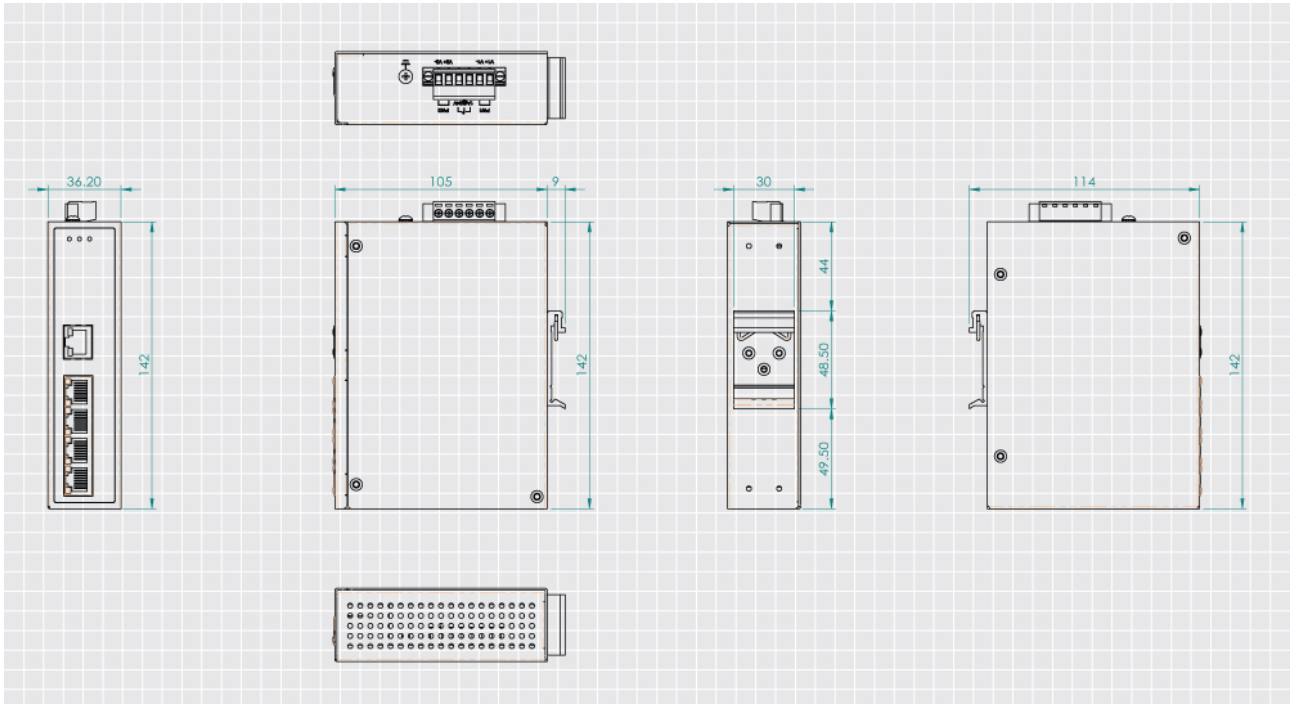

Order Information

IFS-0501

Package Contents

IFS-0501
Power Terminal Block
Mounting Kit
Quick Installation Guide

Optional Accessory



POW-2410

Industrial Power Supply, 24VDC, 30W, DIN-Rail



POW-2420

Industrial Power Supply, 60W, 24VDC, DIN-Rail



POW-2430

Industrial Power Supply, 24VDC, 75W, DIN-Rail



POW-2440

Industrial Power Supply, 120W, 24VDC, DIN-Rail



POW-4801

48V DC Power Adapter



POW-4810

Industrial Power Supply, 48VDC, 40W, DIN-Rail, PoE Ready



POW-4820

Industrial Power Supply, 48VDC, 75W, DIN-Rail, PoE Ready



POW-4830

Industrial Power Supply, 48VDC, 85W, DIN-Rail, PoE Ready



POW-4840

Industrial Power Supply, 120W, 48VDC, DIN-Rail, PoE Ready



POW-4850

Industrial Power Supply, 48VDC, 240W, DIN-Rail, PoE Ready



POW-4860

Industrial Power Supply, 48VDC, 480W, DIN-Rail, PoE Ready



POW-5510

Industrial Power Supply, 55VDC, 85W, DIN-Rail

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.